



REVISIONS			
LET	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	11-15-11	DZ
B	MOD VA/CABLE DIMS, TOLERANCES	04-04-13	DZ


PIN	X1
1	LL
2	UL
3	SENSE
4	LR
5	UR

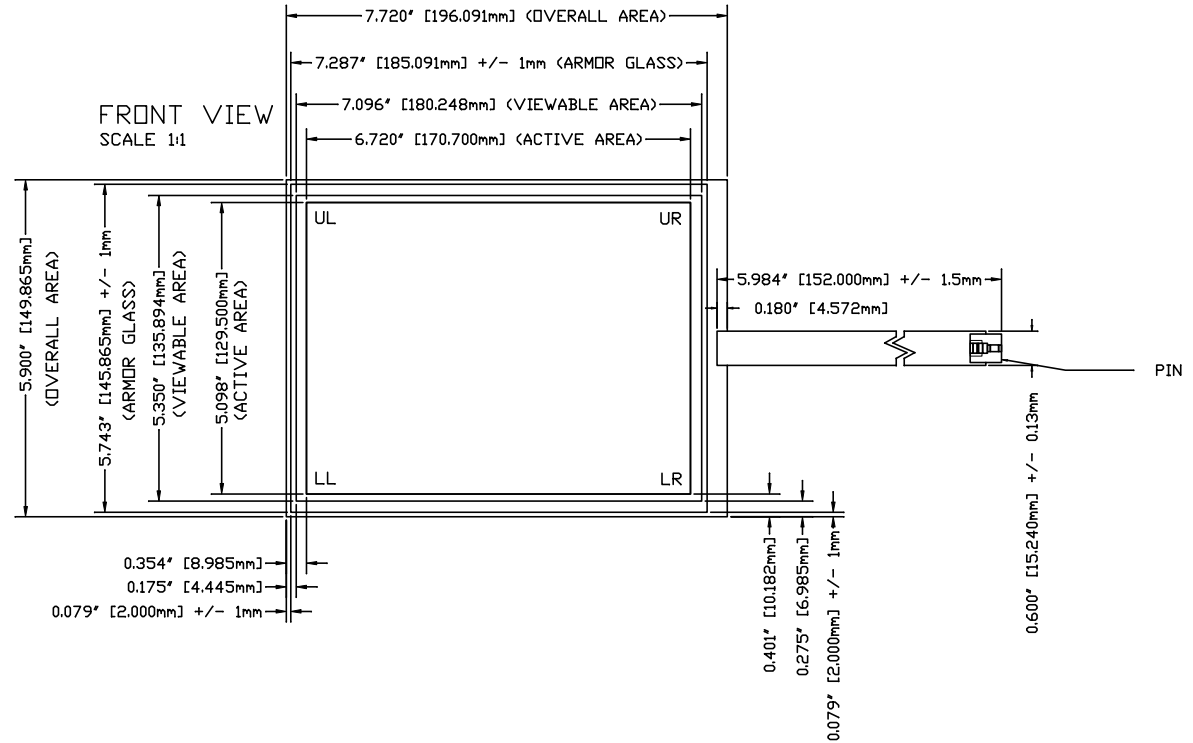

NOTES:

- SUBSTRATE: 3.18MM ITD GLASS
- ALL DIMENSIONS IN INCHES [MILLIMETERS]
- SAFETY SEAM ON ALL EDGES
- CABLE: 5-PIN FFC TYPE
- CONNECTOR: AMP TYPE WITH 0.1" [2.54MM] CENTERS, LATCHING, PART NUMBER 487526-4 OR EQUIVALENT.
- TOUCH SCREEN TO BE ACTIVATED WITHIN ACTIVE AREA ONLY. NON-ACTIVE AREA MUST HAVE SCREENED ON DIELECTRIC. VIEWABLE AREA MUST BE TRANSPARENT WITH NO LINEARITY PATTERN VISIBLE.
- TOTAL SENSOR THICKNESS: 0.142" [3.600MM].
- LINEARITY PATTERN: PEPPER.

SIDE VIEW  
NOT TO SCALE

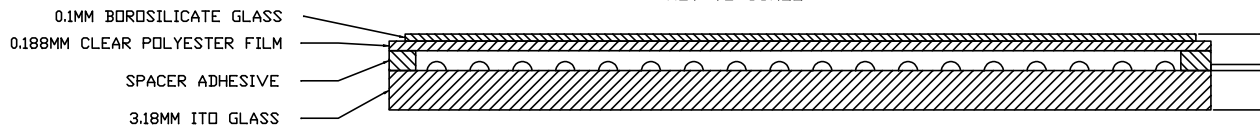

TOLERANCING  
UNLESS OTHERWISE SPECIFIED  
DIMS 4.00mm ANGLES 45°  
DO NOT SCALE DIMENSIONS

ADmetro A 9 METRO - 1881 PARADISE ST - CITTARA, ONTARIO

AD8.4ULTRA

ISSUED BY	PROJECT NUMBER	ISSUED SCALE
DZ	---	---
DATE 04-04-13	REVISED 1	SHEET 1
PROJECT NAME	PART No. 3A99231CL	