



REVISIONS			
LET	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	06-04-12	DZ

FRONT VIEW
SCALE 3:1

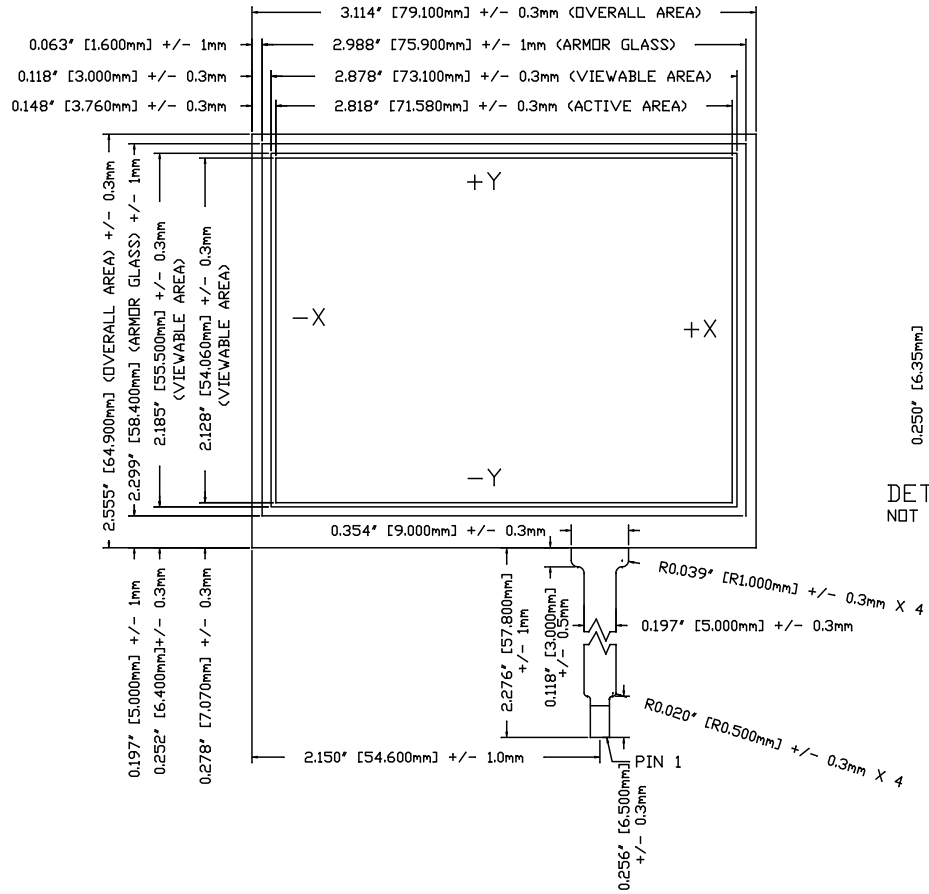


PIN	DESC
1	+Y
2	-Y
3	+X
4	-X
5	NC




NOTES:

- SUBSTRATE: 1.8MM CHEMICALLY STRENGTHENED ITO GLASS. GLASS CHEMICALLY STRENGTHENED BEFORE CUTTING.
- ALL DIMENSIONS IN INCHES (MILLIMETERS).
- SAFETY SEAM ON ALL EDGES.
- CABLE: 5-PIN FPC TAIL TYPE.
- CONNECTOR: ZIF TYPE WITH 0.5MM PITCH.
- TOUCH SCREEN TO BE ACTIVATED WITHIN ACTIVE AREA ONLY. NON-ACTIVE AREA MUST HAVE SCREENED ON DIELECTRIC AND NO CONDENSED DOTS. VIEWABLE AREA MUST BE TRANSPARENT WITH NO BUSBARS VISIBLE.
- TOTAL SENSOR THICKNESS: 0.091" [2.300MM]

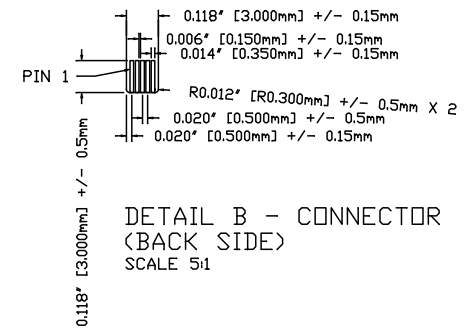

0.1MM BOROSILICATE GLASS
 AG ITO FILM
 SPACER ADHESIVE
 1.8MM CHEMICALLY STRENGTHENED ITO GLASS

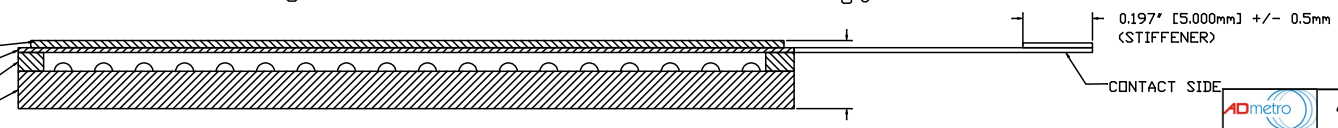

SIDE VIEW
NOT TO SCALE

AD metro A D METRO - 138 PARSON ST - OTTAWA, ONTARIO

AD3.5ULTRA

TOLERANCING	DRWN BY DZ	PKGT/PRTY NO.	---	HWSD SCALE
UNLESS OTHERWISE SPECIFIED	DATE 06-04-12	REV.	1	REV. 1
1. DIMENSIONS	DRW PWD. NO.	REV. PWD. NO.	---	---
2. ANGLES	---	---	---	---
3. SURF FINISH	---	---	---	---
4. HOLE DRILLING	---	---	---	---
5. HOLE TAPPING	---	---	---	---
6. HOLE REAMING	---	---	---	---
7. HOLE POLISHING	---	---	---	---
8. HOLE DEBURRING	---	---	---	---
9. HOLE CHAMFERING	---	---	---	---
10. HOLE REWORK	---	---	---	---

AD-3.5-4RU-01A-200